



SPI Mag® Sensor

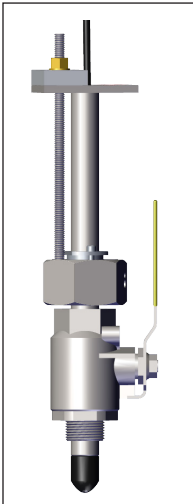

ProComm Converter

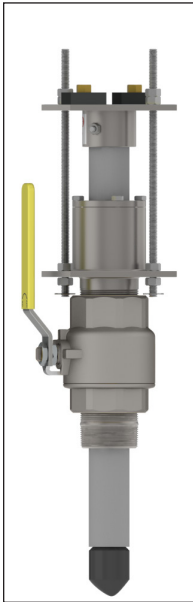

The SPI Mag™ (Single Point Insertion) Electromagnetic Flow Meter is a hot tappable single point insertion flow meter for measuring forward flow. The sensor is available for one-inch or two-inch taps, depending upon line size and application.

The SPI Mag is a cost effective flow meter solution with a purchase price that is independent of line size making the cost to meter a sixty-inch line the same as a two-inch. The SPI Mag's hot tap installation allows for uninterrupted service as it installs without system shut-down, de-watering lines, cutting pipe or welding flanges. Installation costs are reduced by eliminating the need for heavy equipment or extensive manpower. The SPI can be easily re-located to various line sizes.

The compact insertion design fits in confined spaces and offers complete accessibility. The flow meter can be removed in pipes under pressure for easy inspection, cleaning, calibrating or verification. It is particularly cost-effective for retrofit applications replacing flow meters or in sites never metered before.

This cost effective flowmeter is available for line sizes from 2 to 96 inches. The flow sensor comes pre-calibrated from McCrometer's NIST traceable Calibration Lab and requires no recalibration in the field. With no moving parts and a single-piece design, the SPI Mag's sensor contains nothing to wear or break, and it is generally immune to clogging by sand, grit or other debris.

The SPI Mag is easily installed without interruption of the flow process. Sensor insertion hardware is utilized to insert the sensor through a ball valve or corporation stop in the flow conduit. Measurements are taken at the nearest pipe wall with negligible pressure drop in the pipe.

The SPI Mag allows profiling of the pipe inside diameter, further enhancing its measurement accuracy by allowing precise determination of mean velocities.

TYPICAL WATER APPLICATIONS

Both 1" and 2" sizes can be used for waste water and clean water.

Wastewater

- Effluent
- Waste Activated Sludge (WAS)
- Return Activated Sludge (RAS)
- Reclaim / Recycle

Clean Water

- Raw Water Intake
- Clear Wells

BENEFITS

- Easy to relocate to various line sizes
- Ease of hot-tap installation
- Installs without service interruption
- Insertion design for total accessibility
- Price is independent of line size
- No moving parts
- Does not require recalibration in the field

PROCOMM CONVERTER

- Pre-programmed
- Curve-fitting algorithm to improve accuracy
- 4-20mA (1000 ohm) analog output
- Eight line graphical display
- Six key touch programming
- Rugged enclosure meets IP67



FLOW METER SPECIFICATIONS

Measurement	
	<ul style="list-style-type: none"> Volumetric flow in filled flow conduits 2" (50mm) to 96" (2,440 mm) diameter utilizing insertable velocity sensor. 1" meter = 2" to 30" pipe I.D.; 2" meter = 6" to 96" pipe I.D. Flow indication in English Standard or Metric units
Flow Measurement	
Method	Electromagnetic
Accuracy	±2% of reading ±0.03 ft/s (±0.009 m/s) zero stability from 0.3 to 32 ft/s (0.09 to 10 m/s) velocity range
Velocity range	+0.3 to +32 ft/s (+0.09 to +10 m/s)
Direction measurement	Has reverse flow indication
Materials	
Sensor	Polyurethane exposed to flow
2" sensor mounting	PVC and Stainless Steel exposed to flow. (Stainless Steel Insertion Tube Optional)
Compression seal	Buna "N" O-Ring seal exposed to flow
Environmental Ranges	
Pressure/temperature limits	<ul style="list-style-type: none"> PVC Insertion Tube: Up to 105°F (41°C) at 150 PSI Stainless Steel Insertion Tube: Up to 160°F (71°C) at 250 PSI (McCrometer recommends the use of Stainless Steel) <p>Note regarding storage: During freezing conditions and when meter is not in use, sensor must be removed from pipe and stored in dry conditions.</p> <p>NOTE: Damage to the sensor caused by allowing the sensor freeze in the pipe is not covered by the warranty.</p>
Electrical Connections	
	Compression gland seals for 0.125" to 0.375" dia. round cable
Sensor Cable Lengths	
Standard	25' McCrometer supplied submersible cable with each remote mount unit.
Optional	Up to 200 feet, or 25 feet max for battery powered.
IP Rating	
	IP68 submersible sensor

FLOW METER SPECIFICATIONS (CONT.)

Insertion Tube

To determine insertion tube length for typical near wall installations, divide the pipe I.D. by 8 and add 18".

For full profiles, add 18" to the pipe I.D.

Tube assemblies include rods and mounting hardware

1" tube	<ul style="list-style-type: none"> • Stainless steel tube, 12" length. Will profile 4" pipe I.D. • Stainless steel tube, 24" length. Will profile 16" pipe I.D. • Stainless steel tube, 36" length. Will profile 28" pipe I.D.
2" tube	<ul style="list-style-type: none"> • PVC tube, 18" length. Will profile a 10" pipe I.D. • PVC tube, 24" length. Will profile a 16" pipe I.D. • PVC tube, 30" length. Will profile a 22" pipe I.D. • Opt.: stainless steel tube. Specify length - 240" maximum

System Options

- Stainless Steel ID Tag
- Sensor Insertion Tool
- Additional Sensor Cable up to 200' (for longer lengths consult factory)
- Valves

Ordering Requirements

At the time of ordering, please be prepared to provide the following information:

- Model and tap size
- Insertion tube length
- Pressure
- Minimum flow
- Maximum flow
- Typical flow
- Fluid
- Pipe I.D.
- Cable length
- Temperature
- Any other chemicals in use
- Indicator and totalizer units



PROCOMM CONVERTER SPECIFICATIONS

Power Source		
AC	100-240 VAC / 45-66 Hz (10 W)	Note: AC or DC must be specified at time of ordering.
DC	12-48 VDC (10 W)	
Standard Outputs		
Dual 4-20mA Outputs: Galvanically isolated and fully programmable for zero and full scale (0-21mA rangeability)		
Two separate digital programmable outputs: open collector transistor usable for pulse, frequency, or alarm settings.		
<ul style="list-style-type: none"> • Volumetric Pulse • Flow Rate (Frequency) • Hardware Alarm • High/Low Flow Alarms • Empty Pipe • Directional Indication 	<ul style="list-style-type: none"> • Range Indication • Maximum switching voltage: 40 VDC • Maximum switching current: 100mA 	<ul style="list-style-type: none"> • Maximum switching frequency: 1250 Hz • Insulation from other secondary circuits: 500V
Optional Outputs		
<ul style="list-style-type: none"> • Modbus • HART 	<ul style="list-style-type: none"> • Smart Output™ (Sensus, Itron 6, Itron 9) 	<ul style="list-style-type: none"> • Datalogger • Built-in verification
Galvanic Isolation		
All inputs / outputs are galvanically isolated from power supply up to 500 V		
Engineering Units		
<ul style="list-style-type: none"> • Cubic Meter • Cubic Centimeter • Milliliter • Liter • Cubic Decimeter • Decaliter • Hectoliter • Cubic Inches 	<ul style="list-style-type: none"> • US Gallons • Imperial Gallons • Cubic Feet • Kilo Cubic Feet • Standard Barrel • Oil Barrel • US Kilogallon • Ten Thousands of Gallons 	<ul style="list-style-type: none"> • Imperial Kilogallon • Acre Feet • Megagallon • Imperial Megagallon • Hundred Cubic Feet • Megaliters
Conductivity		
Minimum conductivity of 5µS/cm		
Electrical Connections		
Connection options	<ul style="list-style-type: none"> • Compression gland seals for 0.24" to 0.47" diameter round cable • Conduit option: 1/2" NPT threaded connections 	
IP Rating		
IP67 Die cast aluminum converter (only when connected using compression gland seals)		

PROCOMM CONVERTER SPECIFICATIONS (CONT.)

Certifications and Approvals

Standard Model

- ISO 9001:2015 certified quality management system
- CE
- Certified by MET to UL 61010-1



HL Model

- ISO 9001:2015 certified quality management system
- CE
- Certified by MET to UL 61010-1 and MET C22.2 No. 61010-1-04
 - Class I, Division 2, Groups A-D, T5
 - Class I, Zone 2 IIC T5



IMPORTANT

Electrical safety certifications above do not apply to model 282L Single Point Insertion (SPI Mag) Electromagnetic Flow Meter.



IMPORTANT

Refer to certification requirements. Do not substitute components.



IMPORTANT

The ProComm converter, models PC-RA1-HL series and PC-MA1-HL series have no user serviceable parts.

Temperature Range

Operating and storage

-4° to 140° F (-20° to 60° C)

Converter Dimensions

Remote mount

- Height: 7.3" (18.5 cm)
- Width: 8.5" (21.6 cm)
- Depth: 4.3" (10.9 cm)

Meter mount


- Height: 6.9" (17.5 cm)
- Width: 7.2" (18.25 cm)
- Depth: 6.2" (15.7 cm)

Keypad and Display

Can be used to access and change set-up parameters using six membrane keys and an LCD display

CONVERTER DIMENSIONS

Height 7.3" (18.5 cm)
Width 8.5" (21.6 cm)
Depth 4.3" (10.9 cm)

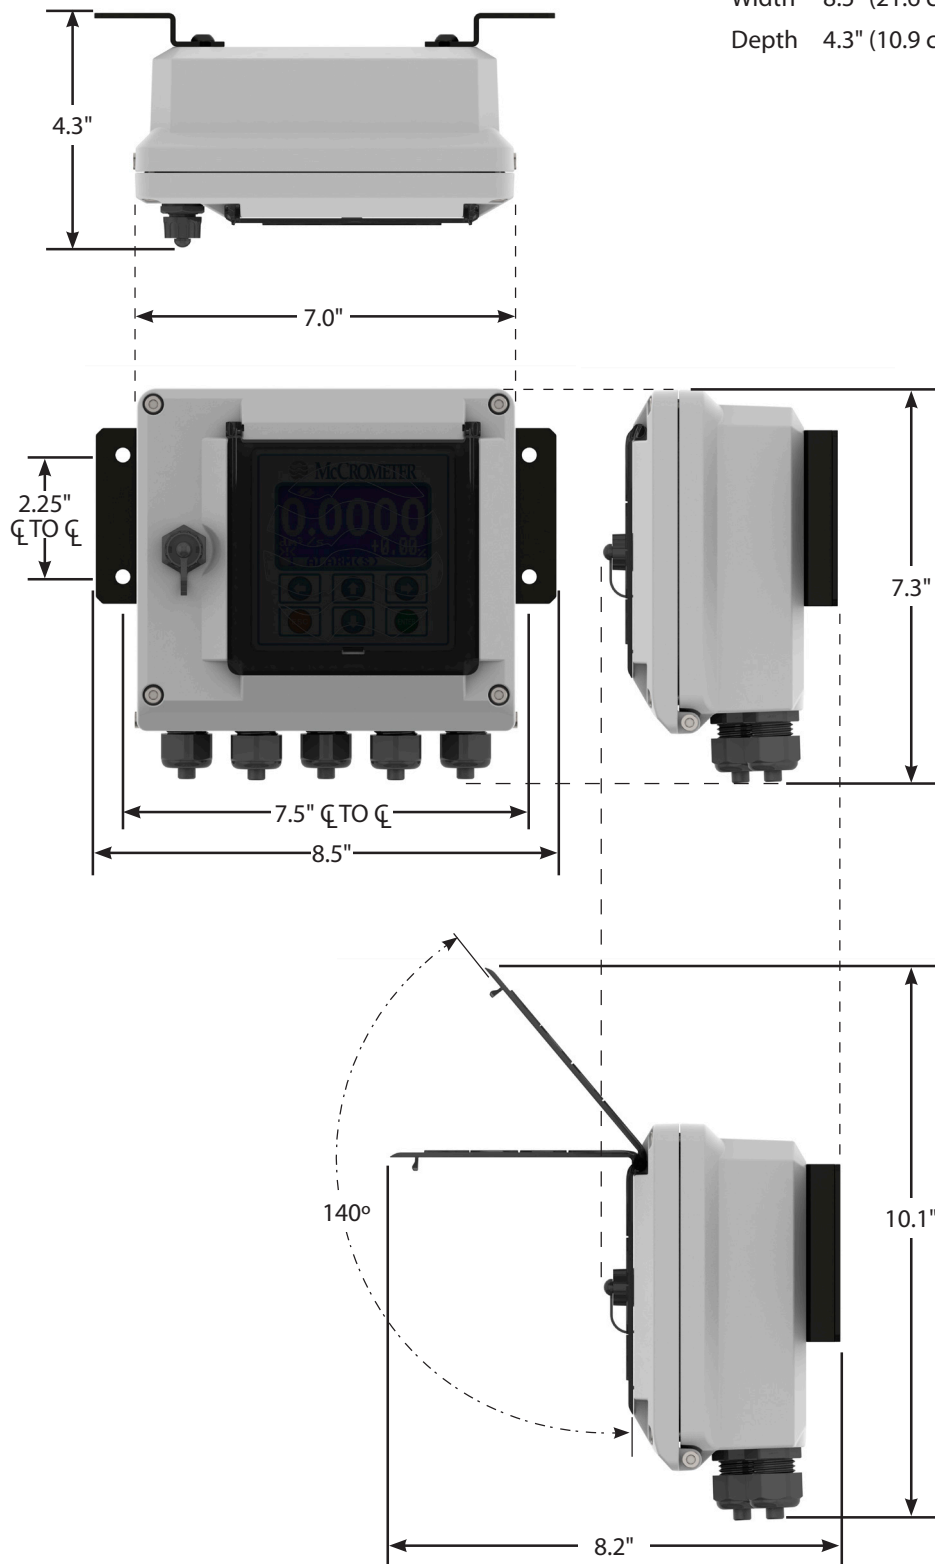

Copyright © 2001-2021 McCrometer, Inc. All printed material should not be changed or altered without permission of McCrometer. Any published pricing, technical data, and instructions are subject to change without notice. Contact your McCrometer representative for current pricing, technical data, and instructions.

3255 WEST STETSON AVENUE • HEMET, CALIFORNIA 92545 USA
TEL: 951-652-6811 • 800-220-2279 • FAX: 951-652-3078
www.mccrometer.com