



**ProComm GO
Converter**

McCrometer's Dura Mag is the easy choice for tough applications. With a 5-year meter warranty and a 5-year battery life, Dura Mag eliminates the need for AC power connection while providing the easiest installation possible for a flanged mag flow meter.

The meter is available to fit a common range of irrigation line sizes, from 1 1/2" to 12" diameter pipe. Dura Mag offers accuracy of $\pm 1\%$ with minimal upstream and downstream straight pipe required for most installations, all with the durability that customers have come to expect from McCrometer for over 65 years.

Standard and Hazardous Location Models

Dura Mag is designed to work in ordinary circumstances and in hazardous locations. Dura Mag is available as either the standard model or as a hazardous location (HL) model, which is certified by MET.

Certifications

Dura Mag currently has three certifications for quality and safety:

- ISO 9001:2015 certified quality management system
- Certified by MET to UL 61010-1 / CSA C22.2 No. 61010-1
- Certified to NSF / ANSI Standards

Dura Mag is certified by IAPMO R&T to NSF/ANSI 61 for material safety and NSF/ANSI 372 for low lead content.

MET certification for HL models is described in greater detail in the meter specifications on page 6.

The integrated electronic converter is secured with tamper evident screws. The meter offers flow rate and totalizer with a 5-year battery warranty. Dura Mag features three 3.6V lithium-thionyl chloride (Li-SOCl₂) D size batteries, with two AA batteries serving as back-up power. The main power batteries are easily replaced in the field.

AVAILABLE DURA MAG END CONNECTIONS

Nominal Line Size	AWWA CL D	AWWA CL F	ANSI 150#	ANSI 300#	Wafer
1.5 in			x		
2 in			x	x	x
2.5 in			x		
3 in			x	x	x
4 in	x		x	x	
6 in	x		x	x	
8 in	x		x	x	
10 in	x		x	x	
12 in	x		x	x	

KEY APPLICATIONS

Agriculture

- Irrigation
- Center Pivot Systems
- Well Monitoring
- Water Distribution
- Dairy Lagoons
- Surface Water
- Chemigation Downstream
- Golf Course & Park Management
- Sandy Water

Key Features

- 5-year meter warranty
- 5-year battery warranty
- Lifetime liner guarantee
- Battery powered for easy installation – eliminate the hassle of cables or AC power
- Durable design – Proven in tough environments
- 10 minute DIY replaceable battery pack, keeps your meter running
- Made in the USA

Pulse, 4-20mA, and AMI output are available for remote meter reading or SCADA. Dura Mag is compatible with McCrometer CONNECT wireless systems, which allows users to access flow data by simply logging on to the Internet. This eliminates costly manual meter reading.



Installation

Dura Mag flow meter installation is similar to placing a short length of flanged end pipe in the line. The meter can be installed vertically, horizontally, or inclined on suction or discharge lines. The meter must have a full pipe of liquid for proper operation. Fluid must be grounded to the downstream flange of the sensor either via internal grounding electrodes (2 - 12") or using McCrometer 316 SS grounding rings. For best performance, grounding rings are recommended for all sizes.

The meter needs to be located a minimum distance before and after flow disturbances, such as elbows, pumps, partially opened valves, and changes in pipe diameter. The uneven flow created by these obstructions can vary with each system.

The minimum distance is measured in pipe diameters (D). To ensure accuracy locate the sensor upstream and downstream of flow disturbances as follows:

1½" to 3" Flanged style meters	0D upstream / 0D downstream
2" and 3" Wafer style meters	3D upstream / 1D downstream
4" to 12" Steel flanged meters	2D upstream / 1D downstream

All blending and chemical injection should be done early enough so the flow media is thoroughly mixed prior to entering the measurement area.

ProComm GO Converter

The signal converter is the reporting, input and output control device for the sensor. The converter allows the measurements, functional programming, control of the sensor and data recording to be communicated through the display and inputs & outputs.

The microprocessor-based signal converter has a multi-point curve-fitting algorithm to improve accuracy and a rugged enclosure that meets IP67. The microprocessor continually monitors the converter's functionality.

The converter will output rate of flow and total volume. The converter also comes many more features that is fully user-configurable using the configuration tool via the USB port and a laptop computer.

[illegible]

[illegible]

PROCOMM GO PART NUMBER STRUCTURE

PG -		-	-	-	-	-	-	-	-
Converter Mounting Options									
Meter Mount Converter (Standard)	M								
Remote Mount	R								
Converter Power Options									
Battery Power (Standard)	B								
Solar Power, Battery Backup	S								
A/C Power, Battery Backup	E								
DC Power, Battery Backup	F								
Converter Output Options									
No Outputs (Standard)	-								
No Outputs, DC Cable Only	0								
Two Digital Out	1								
4-20mA Analog only	2								
4-20mA Analog + Two Dig Out	3								
AMI Smart Output Only	4								
AMI Smart Output + Two Dig Out	5								
AMI Smart Output + 4-20mA Analog	6								
AMI Smart Output + 4-20mA Analog + Two Dig Out	7								
DC Power/ Analog Out Cable Options									
No DC Power or Outputs (Standard)	-								
No Cable - Output Configured (Quick Conn)	0								
6 ft (Open Leads - Strain Relief)	1								
25 ft (Open Leads)	2								
50 ft (Open Leads)	3								
Pulse Cable Length Options									
No Outputs (Standard)	-								
No Cable - Output Configured (Strain Relief or Quick Conn)	0								
6 ft (Open Leads)	1								
25 ft (Open Leads)	2								
50 ft (Open Leads)	3								
25 ft (7-Pin Male connector for Telemetry)	4								
50 ft (7-Pin Male connector for Telemetry)	5								
Output Cable Terminal Options									
Strain Relief (Standard)	1								
Quick Connect (25 & 50 ft Cable length only)	2								
Smart Output Protocol Options (*4 - 7 output option required)									
No AMI Outputs	-								
Sensus Protocol (6ft cable, Nicor Connector hardwired only)	SEN								
Itron 6 digit Protocol (6ft cable, Nicor Connector hardwired only)	IT6								
Itron 9 digit [100W] Protocol (6ft cable, Nicor Connector hardwired only)	IT9								
Neptune Protocol (6ft cable, Nicor Connector hardwired only)	NEP								
ATT Wireless Telemetry System (RTU, Solar Panel, 15 ft 7 pin Cable)	ATT								
Verizon Wireless Telemetry System (RTU, Solar Panel, 15 ft 7 pin Cable)	VZW								
Hazardous Area Location									
Class 1, Division 2, Groups A-D, T5	HL								

DURA MAG FLOW METER SPECIFICATIONS

Physical Specifications

Directionality	Single direction and bidirectional
Pipe Sizes	1.5" 2", 2.5", 3", 4", 6", 8", 10", 12"
Body Style	Unflanged and flanged tube
Electrical Connections	Optional quick connect for easy installation

Performance and Operational Specifications

Operating Temperature	-4° to 140°F (-20° to 60°C)
Storage Temperature	-40° to 149°F (-40° to 65°C)
Operating Pressure	150 psi
Accuracy	+/- 1% of measured value ± 0.006 ft/s (± 0.0018 m/s) All Dura Mag meters are calibrated in a NIST traceable gravimetric test stand with a minimum straight run of 10D upstream and 2D downstream. A calibration certification report is provided with each Dura Mag meter certifying the specification accuracy in our laboratory test. Alternative piping configurations or electrical environments may impact the performance of the meter in the field.
Pipe Run Requirements	1½" to 3" Flanged style meters: 0D upstream / 0D downstream 2" and 3" Wafer style meters: 3D upstream / 1D downstream 4" to 12" Steel flanged meters: 2D upstream / 1D downstream

Certifications

Standard Model	<ul style="list-style-type: none">• ISO 9001:2015 certified quality management system• Certified by MET to UL 61010-1 / CSA C22.2 No. 61010-1• Certified to NSF / ANSI Standards*	  
HL Model	<ul style="list-style-type: none">• ISO 9001:2015 certified quality management system• Certified by MET: Safety: UL61010-1 / CSA C22.2 No. 61010-1, Third Edition: Safety of Electrical Equipment For Measurement, Control, and Laboratory Use• Certified by MET: Standards: ANSI / ISA12.12.01 / CSA C22.2 No. 213, Nonincendive Electrical Equipment<ul style="list-style-type: none">• Class I and II, Division 2• Class III, Divisions 1 and 2 Hazardous (Classified) Locations• Certified to NSF / ANSI Standards*	
* Dura Mag is certified by IAPMO R&T to NSF/ANSI 61 for material safety and NSF/ANSI 372 for low lead content.		

Other Specifications

Options and Accessories	<ul style="list-style-type: none"> Bidirectional Annual verification / calibration Stainless Steel ID tag
Warranty	Meter: 5-year warranty Battery: 5-year warranty Liner: Lifetime guarantee

PROCOMM GO CONVERTER SPECIFICATIONS

Physical Specifications

Electronic Housing	Diecast aluminum, powder coated enclosure w/ tamper resistant seal, 6½" x 6½" x 43/8" tall
Converter Dimensions	See "Dimensions" section for meter mount and remote mount converter dimensions.
Power	Battery: Standard: three 3.6V lithium-thionyl chloride (Li-SOCl ₂) D size batteries with two AA backup batteries AC Power: 100-240VAC/45-66Hz (4W) DC Power: Linear power supply 10-35VDC (4 W)
Electrical Connections	<ul style="list-style-type: none"> Optional shielded cable for 10-32VDC/4-20 mA output Optional shielded cable for pulse out

Performance and Operational Specifications

Battery Life	Five-year expected battery life, five-year battery warranty
Location	Indoor or outdoor use
Altitude	Operating: 2000 meters Storage: 12,000 meters
Operating Temperature	-4° to 140° F (-20° to 60° C)
Storage Temperature	-4° to 140° F (-20° to 60° C)
Relative Humidity	0% to 100%
IP Rating	IP67 Die cast aluminum converter
Outputs	Digital output: Digital pulse (open collector) output for volumetric - Two isolated digital pulse (open collector) outputs for volumetric - AMI output Analog output: 4-20mA: Galvanically Isolated, 16 Bit resolution. All power configurations (including battery). Note: 9-30 VDC loop power required (not supplied via converter)

Display and Measurement

Display	<ul style="list-style-type: none">• 2-Line LCD display (no backlight)• Non-volatile memory• Anti-reverse totalizer (standard)• Total (to 9 digits of precision)		<ul style="list-style-type: none">• Flow rate and velocity (to 5 digits of precision)• Two alarms: low battery and empty pipe (optional)• Opening lid activates display			
	Digits					
		5 Rate, 9 Total				
Units	GPM	Gallons per minute	IGM	Imperial gal per minute	CFM	Cubic feet per minute
	MGD	Mega gal per day	MI9	Miners inch (9G)	B5M	Barrels per minute (55G)
	CFS	Cubic feet per second	MI1	Miners inch (11.22G)	B5H	Barrels per hour (55G)
	MLD	Megaliters per day	APD	Acre feet per day	B5D	Barrels per day (55G)
	LPS	Liters per second	KLH	Kiloliters per hour	B4M	Barrels per minute (42G)
	CMH	Cubic meters per hour	LPH	Liters per hour	B4H	Barrels per hour (42G)
	LPM	Liters per minute	CMM	Cubic meters per minute	B4D	Barrels per day (42G)
	GPH	Gallons per hour	CFM	Cubic feet per minute		

Totalizer Units	GAL	Gallons	B42	Barrel (42G)	MH1	Miners	Inch	Hour
	CUF	Cubic Feet	B46	Barrel (46G)				(11.22G)
	AFT	Acre Feet	B55	Barrel (55G)	MD1	Miners Inch Day		(11.22G)
	CUM	Cubic Meters	IMG	Imperial Gallon	MH9	Miners Inch Hour		(9G)
	LIT	Liters	AIN	Acre Inch	MD9	Miners Inch Day		(9G)
	MML	Megaliter	TON	Ton (Short)	KGL	Kilo Gallons		
	MTT	Metric Ton (KL)	MM1	Miners Inch Minute (11.22G)	MGL	Mega Gallons		
	B31	Barrel (31G)	MM9	Miners Inch Minute (9G)	IN3	Cubic Inch		
Data Logger	Standard with all models, minimum of five years of data stored							

Other Specifications

Options and Accessories

- Data Logger - included as standard with five years of data storage at default (12hr) interval. (Cable sold separately)
- AC, DC, and battery powered with battery backup powered available

Safety

- IEC 61010-1, Pollution Degree II
- Overvoltage protection Category III

Certifications

Standard Model

- ISO 9001:2015 certified quality management system
- Certified by MET to UL 61010-1 / CSA C22.2 No. 61010-1
- Certified to NSF / ANSI Standards*

HL Model

- ISO 9001:2015 certified quality management system
- Certified by MET: Safety: UL61010-1 / CSA C22.2 No. 61010-1, Third Edition: Safety of Electrical Equipment For Measurement, Control, and Laboratory Use
- Certified by MET: Standards: ANSI / ISA12.12.01 / CSA C22.2 No. 213, Nonincendive Electrical Equipment
 - Class I and II, Division 2
 - Class III, Divisions 1 and 2 Hazardous (Classified) Locations
- Certified to NSF / ANSI Standards*




* Certified by IAPMO R&T to NSF/ANSI 61 for material safety and NSF/ANSI 372 for low lead content.

METER GROUNDING RECOMMENDATIONS


Dura Mag meters come standard with a set of grounding rings for use with the preferred method of grounding Dura Mag meters.

Grounding the meter body for safety according to national (NEC) or local electrical codes is recommended on ALL meter installations. Dura Mag meters come standard with a set of grounding rings for use with the preferred method of grounding Dura Mag meters.


See the Dura Mag IOM Manual, Lit. # 30122-53, for more information on grounding configurations using grounding rods and grounding rings.

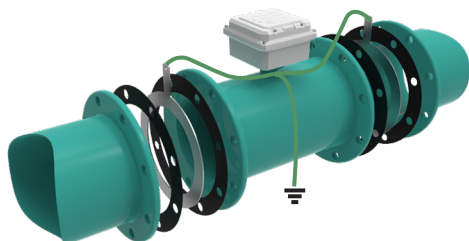

Preferred method of grounding

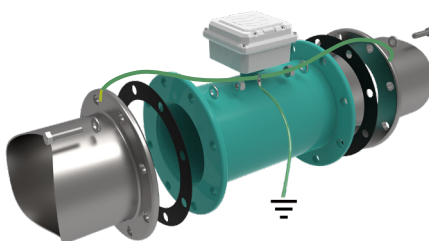

Sensor grounding for meters in an electrically noisy environment




Sensor grounding for meters with minimal ground noise

DIMENSIONS AND WEIGHTS

Wafer Mag Models

Pipe Size (Nominal)	Flow Ranges (0.2 to 32 FPS) Min-Max GPM	DIMENSIONS (Lay Lengths)		Est. Shipping Weight (lbs.)*
		A	B	
2"	1.29-200	4.5	6.5	9.6
3"	3.25-510	4.5	7.0	11.3


* For remote mount meters, add 4 lbs for ProComm converter.

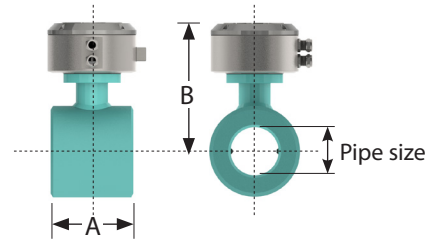

1½" to 3" Models

Pipe Size (Nominal)	Flow Ranges (0.2 to 32 FPS) Min-Max GPM	DIMENSIONS (Lay Lengths)							Est. Shipping Weight (lbs.)*	
		A		B	C		D		CL150 ANSI 150#	CL300 ANSI 300#
		CL150 ANSI 150#	CL300 ANSI 300#		CL150 ANSI 150#	CL300 ANSI 300#	CL150 ANSI 150#	CL300 ANSI 300#		
1 ½"	1.29-200	11	not offered	4.5	5.0	not offered	6.5	not offered	45	not offered
2"	1.29-200	11	14	4.5	6.0	6.5	6.5	7.25	45	70
2 ½"	3.25-510	13.4	not offered	4.5	7.0	not offered	7.0	not offered	50	not offered
3"	3.25-510	13.4	15.5	4.5	7.5	8.25	7.0	7.75	55	80


* For remote mount meters, add 4 lbs for ProComm converter.



4" to 12" Models

Pipe Size (Nominal)	Flow Ranges (0.2 to 32 FPS) Min-Max GPM	DIMENSIONS (Lay Lengths)									Est. Shipping Weight (lbs.)*		
		A			B			C					
		AWWA		ANSI	AWWA		ANSI	AWWA		ANSI	AWWA		ANSI
		150# Class D	150# CL150	300# CL300	150# Class D	150# CL150	300# CL300	150# Class D	150# CL150	300# CL300	150# Class D	150# CL150	300# CL300
4"	6.97-1110	13.4	13.4	13.4	9.0	9.0	10.0	9.25	9.25	9.25	70	108	108
6"	16.1-2560	14.6	14.6	14.6	11.0	11.0	12.5	10.25	10.25	10.25	80	138	138
8"	29.2-4670	16.1	17.25	17.25	13.5	13.5	15.0	11.25	11.25	11.25	115	195	195
10"	46.3-7400	18.5	18.5	18.5	16.0	16.0	17.5	12.5	12.5	12.5	140	247	247
12"	67.3-10760	19.7	19.7	19.7	19.0	19.0	20.5	13.5	13.5	13.5	190	342	342

*Shipping weights are estimated and may change due to specific order packaging

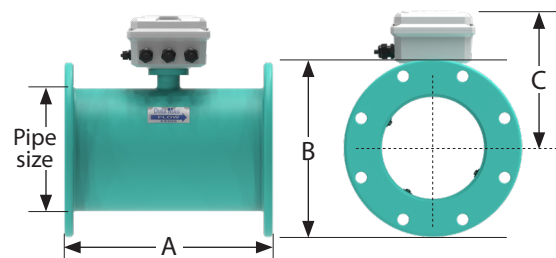




Specification Sheet Dura Mag Flow Meter

Dura Mag S Series and P Series meters are available in lay lengths compatible with products from other meter suppliers. See the tables below for matched lay length options.

Pipe Size (Nominal)	Other Supplier Dimensions*		S Series Dimensions	
	L (in.)	Weight (lbs.)	L (in.)	Weight (lbs.)
4"	10.24	34	10.24	70
6"	12.27	50	12.27	80
8"	14.24	71	14.24	115
10"	18.18	130	18.18	140
12"	19.68	170	19.68	190


* Seametrics Electromagnetic Meters (Ag3000/Ag3000P or iMag4700 series); Seametrics® is a registered trademark of their respective owners.

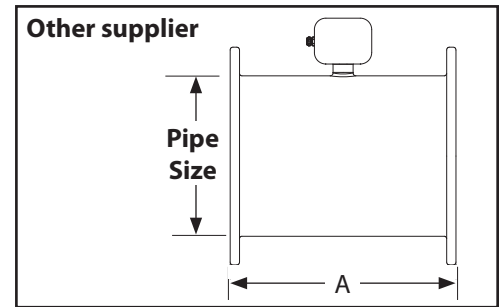


Pipe Size (Nominal)	Other Supplier Dimensions**				P Series Dimensions			
	150 lb psi		300 lb psi		150 lb psi		300 lb psi	
	L (in.)	Weight (lbs.)	L (in.)	Weight (lbs.)	L (in.)	Weight (lbs.)	L (in.)	Weight (lbs.)
4"	6	55	6	***	6.25	50	6.25	***
6"	13.38	75	14.88	***	13.38	65	14.88	***
8"	13.38	105	15.40	***	13.38	120	15.40	***
10"	18.15	155	20.55	***	18.15	130	20.55	***
12"	19.40	235	21.78	***	19.40	170	21.78	***

** Sparling Instruments (Tigermag EP FM656); Sparling® is a registered trademark of their respective owners.



*** Contact factory for weight.

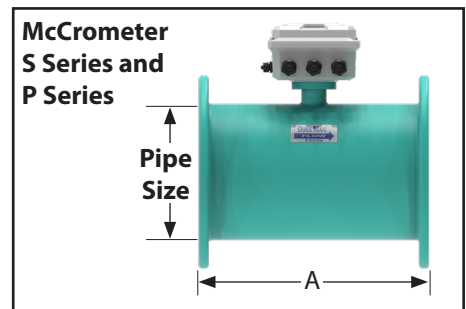



PROCOMM GO CONVERTER DIMENSIONS

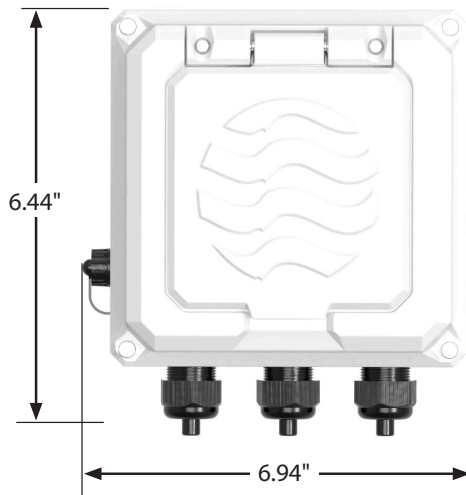

Meter mount converter

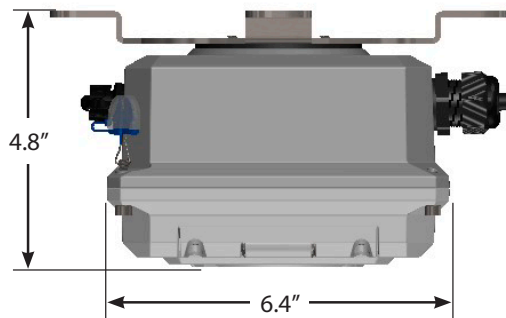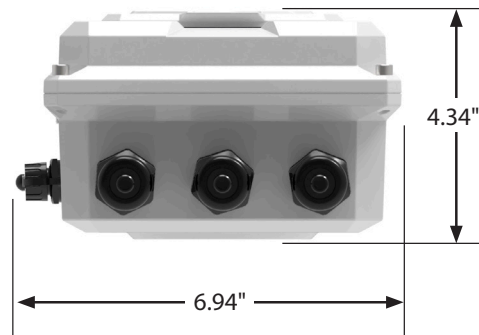

Remote mount converter

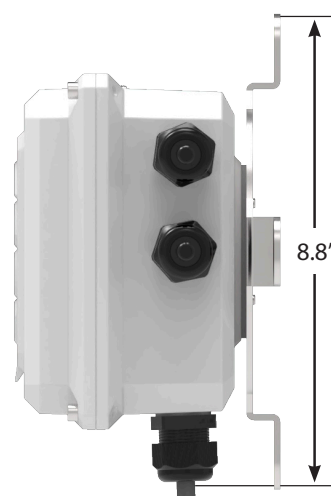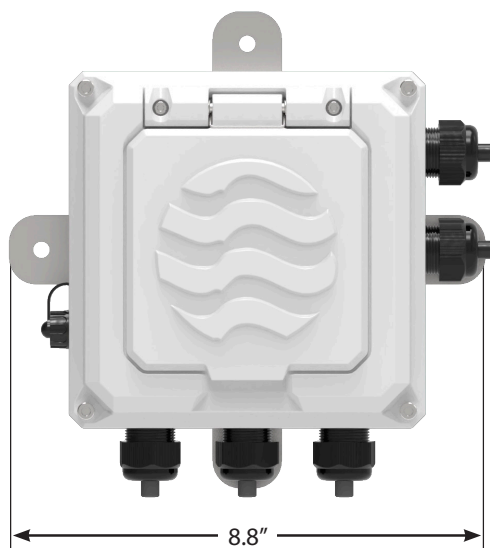

Copyright © 2023 McCrometer, Inc. All printed material should not be changed or altered without permission of McCrometer. Any published pricing, technical data, and instructions are subject to change without notice. Contact your McCrometer representative for current pricing, technical data, and instructions.

3255 WEST STETSON AVENUE • HEMET, CALIFORNIA 92545 USA
 TEL: 951-652-6811 • 800-220-2279 • FAX: 951-652-3078
www.mccrometer.com